

MANITRANSIT ■ TMT 2020 SR



Rough-terrain telescopic truck-mounted forklift

- Maximum capacity 2000 kg
- Excellent ratio weight/capacity
- Ultra-Compact
- Unloading from one side of the deck

TMT 2020 SR



CAPACITY

Maximum Capacity2000 kg



LIFTING

Maximum lifting height3300 mm

Maximum front reach1350 mm

Side-shift.....135 mm



ENGINE / TRANSMISSION

TypeKUBOTA (27 HP)

Hydrostatic transmission

Driving wheels3



TYRES

Front tyres.....26x12-12 10 PR

Rear tyre26x12-12 10 PR



DIMENSIONS

Width2449 mm

Height2159 mm

Overhang (in transport position)1400 mm

Weight (without equipment)2000 kg

IN STANDARD

ROPS/FOPS Cab + load indicator

FNR joystick

Waterproof dashboard and electric connections

Stabilisers

Differential lock

Anticorrosion treatment by cataphoresis

OPTIONS

Full mounting kit

Load repartition calculation (on request)


Rearview mirrors

Rotating beacon


Road lights

Working lights and reversing light

Load backrest

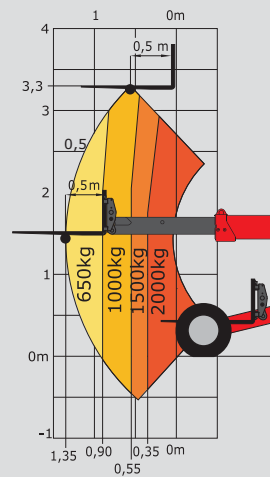

On tyres

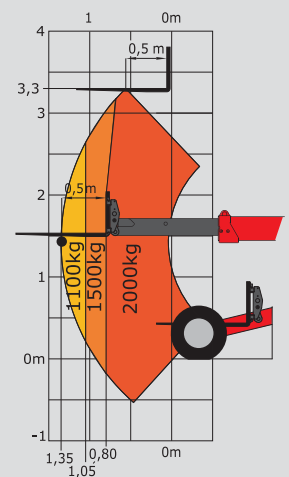

On stabilisers

(Under EN 1459 B)

LONG BOOM



Enables you to offload your lorry from one side : less space required to operate & more time saving.

FNR JOYSTICK



This new « boom control » joystick now integrates the « reversing shift » function : the driver can keep one hand on the steering wheel and one hand on this joystick to operate any movement. Time saving and much better driving position.



This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments. IMPORTANT : All regulations relating to vehicles apply to vehicles equipped with truck-mounted forklifts. Patented design

STABILISERS



The 2 front stabilisers of the TMT 2020 SR give more lifting capacity, especially when the boom is fully extended at maximum reach.

MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700342EN-B - 12/07

